


Ultrasonic retro-reflective sensors

URDK 10N8914/S35A

dimension drawing



general data

sensing range sd	0 ... 200 mm
reflector position Sde	40 ... 200 mm
adjusting range reflector (operating range)	$\pm 2,5 \%$ Sde
adjusting range reflector (limit range)	$\pm 5 \%$ Sde
repeatability	< 1,5 mm
alignment aid	target display flashing
adjustment	Teach-in
temperature drift	< 2 % Sde
response time ton	< 15 ms
release time toff	< 15 ms
sonic frequency	380 kHz
output indicator	LED green

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max.	30 mA
output circuit	NPN make function (NO) / break function (NC)
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
housing material	plastic (ASA)
width / diameter	10,4 mm
height / length	27 mm
depth	14 mm
connection types	connector M8


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

photo



connection diagram

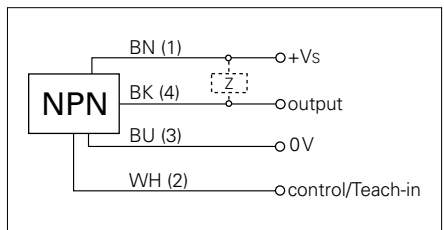

- make function/break function, programmable