


Ultrasonic proximity sensors

UZAM 30N6103/S14

dimension drawing



general data

special type	2 point proximity switch
sensing range sd	100 ... 1000 mm
scanning range far limit Sde	100 ... 1000 mm
version	standard
hysteresis typ.	4 % Sde
repeatability	< 0,5 mm
temperature drift	< 2 % Sde
adjustment	Teach-in
response time ton	< 40 ms
release time toff	< 40 ms
alignment aid	target display flashing
sonic frequency	240 kHz
output indicator	green / yellow LED

electrical data

voltage supply range +Vs	12 ... 30 VDC
current consumption max.	35 mA
output circuit	NPN make function (NO)
output current	< 200 mA
voltage drop Vd	< 2 VDC
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical
housing material	brass nickel plated
width / diameter	30 mm
height / length	70 mm
connection types	connector M12


ambient conditions

operating temperature	-10 ... +60 °C
protection class	IP 67

photo



connection diagram

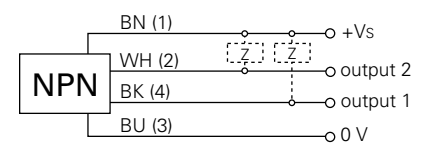

- Two separate outputs
- Teach-in