O330.EP-PDPVZ.72ZV/H006

Through beam sensors - miniature Article number: 11261249

Overview

- Most secure object detection due to the barrier principle
- Fixed preset for the simplest commissioning
 Quick mounting by means of M3 threaded bushes made of brass



Picture similar






Technical data	
General data	
Туре	Through beam sensor
Emitter / receiver	Receiver
Actual range Sb	10 m
Nominal range Sn	12 m
Alignment / soiled lens in- dicator	Flashing output indicator
Output indicator	LED yellow
Power on indication	LED green
Sensitivity adjustment	No
Suppression of reciprocal influence	Yes
Electrical data	
Response time / release time	< 0.8 ms
Voltage supply range +Vs	10 30 VDC
Current consumption max. (no load)	50 mA
Current consumption typ.	25 mA
Voltage drop Vd	< 2 VDC


Electrical data	
Output function	Light / dark operate
Output circuit	PNP complementary
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes
Mechanical data	
Width / diameter	11 mm
Height / length	32 mm
Depth	21 mm
Type	Rectangular
Type Mechanical mounting	Rectangular Threaded sleeves M3 (brass)
**	<u> </u>
Mechanical mounting	Threaded sleeves M3 (brass)
Mechanical mounting Housing material	Threaded sleeves M3 (brass) Plastic (ABS, ASA, PMMA)
Mechanical mounting Housing material Front (optics)	Threaded sleeves M3 (brass) Plastic (ABS, ASA, PMMA) PMMA
Mechanical mounting Housing material Front (optics) Connection types	Threaded sleeves M3 (brass) Plastic (ABS, ASA, PMMA) PMMA Cable 4 pin, 2 m
Mechanical mounting Housing material Front (optics) Connection types Cable characteristics	Threaded sleeves M3 (brass) Plastic (ABS, ASA, PMMA) PMMA Cable 4 pin, 2 m
Mechanical mounting Housing material Front (optics) Connection types Cable characteristics Ambient conditions	Threaded sleeves M3 (brass) Plastic (ABS, ASA, PMMA) PMMA Cable 4 pin, 2 m PVC / PVC 4 x 0.14 mm²

O330.EP-PDPVZ.72ZV/H006


Through beam sensors - miniature Article number: 11261249

Technical drawings

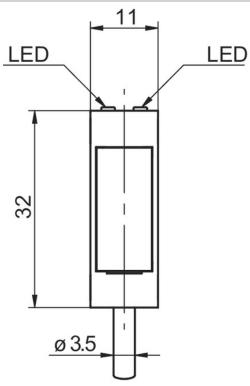

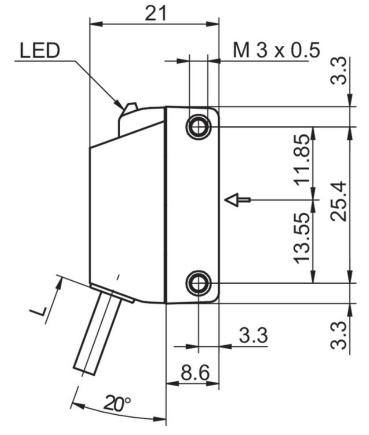

Connection diagram



Excess gain curve

